



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



6200

COMPACT RIDER SWEEPER

- Exceptional performance with efficient, one-pass sweeping and dust containment
- Superb maneuverability from compact size and easy operation
- Dramatically reduced cleaning costs with highly reliable Tennant parts and engineering

EXPERTLY-DESIGNED 6200 SWEEPER OFFERS EFFORTLESS OPERATION AND INCREASED PRODUCTIVITY



Engineered and built with Tennant's high quality parts, the 6200 delivers virtually continuous operation. Increase productivity with efficient one-pass cleaning, and multi-level dump hopper.

EXCELLENT SWEEPING AND DUST CONTROL

AutoAdjust™ design matches brush height to brush wear for sweeping of light dust and debris in one pass. The 6200's 2-stage dust control helps remove air-borne dust.

WORRY-FREE DURABILITY

Solid steel frame, hydraulic oil system and no-tool brush changes keep the reliable 6200 up and running.

EASY OPERATION FOR INCREASED PRODUCTIVITY

Excellent sightlines, easy-to-use controls, and the multi-level dump hopper makes for easy operation. The hopper can be emptied directly into containers up to 4.5 ft / 1.37 m.

INSIDE THE

6200



HIGH DUMP HOPPER FOR EASE OF USE AND OPERATOR SAFETY

The standard multi-level high dump hopper eliminates manual lifting, helping keep operator safe.

The large capacity hopper means more sweeping between dumpings.

MUST-HAVE OPTIONS

Extend cleaning reach


Access hard-to-reach areas with the optional instantly activated vacuum wand.

Enhance capability

QuickMop® effectively dry mops smooth concrete or finished surfaces with the mop's wide, 5.5 ft / 1.67 m, path.

Increase productivity

Dual side brushes expand the machine's sweeping reach to clean more floor space in less time.

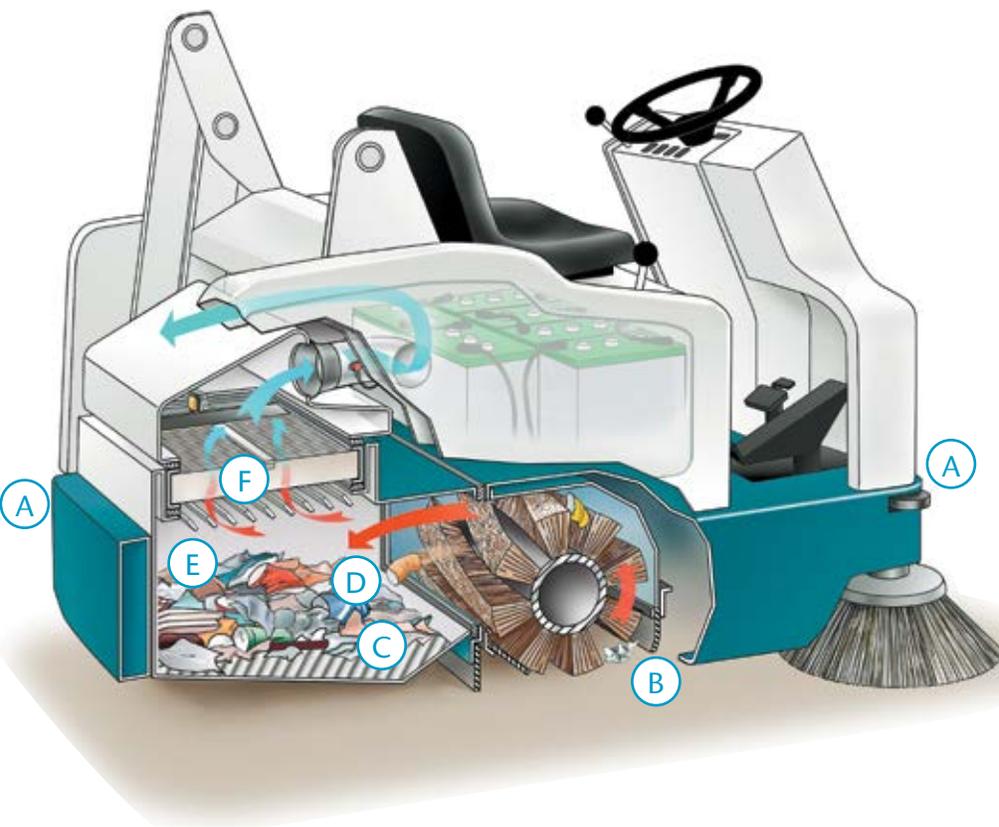

A **Protect fixtures and equipment**, as well as the sweeper, with the rear bumper and corner rollers.

B **Maintain maximum cleaning power** with the patented AutoAdjust™ brush cavity that automatically adjusts as bristles shorten.

C **Thermo-Sentry™** monitors the hopper temperature and, in dangerously high temperatures, initiates vacuum shut-down.

D **Effectively load different types of debris** with adjustable four-sided, front-loading hopper and a sweeping system that can adjust to the type of debris.

E **Conveniently empty hopper** directly into containers up to 4.5 ft / 1.37 m.

F **VCS® filter-shaking system** effectively contains dust and keeps filter pleats free of clogs.

- Reduce rework, labor and safety costs by using only TennantTrue parts and service.
- Ensure optimal cleaning performance by selecting a TennantTrue Service program provided by a network of over 400 factory-trained Tennant service representatives.
- Improve uptime by leveraging TennantTrue parts and service.
- Simplify budgeting by bundling TennantTrue service plans, including parts, into the purchase or financing of your machine.
- Manage your cleaning program with real-time machine data from Tennant's IRIS™ technology.

Choose GE Capital or U.S. Bancorp, our leasing providers, for simple, quick financing with flexible upgrade options.

6200 COMPACT RIDER SWEEPER

SWEEPING SYSTEM

Cleaning path	
One side brush	42 in / 1,070 mm
Two side brushes	55 in / 1,400 mm
Main brush	
Main brush length (tubular)	28 in / 710 mm
Main brush drive	Belt
Main brush change	No-tool
Side brush diameter	20.5 in / 520 mm
Debris hopper	
Volume capacity	4.4 ft ³ / 125 L
Weight capacity	300 lb / 136 kg
Dump height (variable to)	4.5 ft / 1.37 m

DUST CONTROL SYSTEM

Filter system (dual stage, to 3 microns)	
Stage 1	Perma-filter™
Stage 2	49 ft ² panel filter / 4.6 m ² panel filter
Dust filtration (to)	3 microns
Vacuum fan speed	4,300 rpm

PROPELLING SYSTEM

Battery package	235 Ah
Propelling motor	0.75 hp / 0.56 kW
Battery Model: Forward (variable to)	5.5 mph / 9 km/h
Reverse (variable to)	3 mph / 4.8 km/h
Gradeability	
Full hopper	6.0 deg/11%
Empty hopper	10.0 deg/18%

MACHINE SPECIFICATIONS

Length	77 in / 1,960 mm
Width	
With one side brush	48.5 in / 1,230 mm
With two side brushes	56 in / 1,420 mm
Without side brush	42 in / 1,050 mm
Height	56.5 in / 1,440 mm
Weight	
With battery	2,034 lb / 923 kg
Without battery	1,644 lb / 746 kg

WARRANTY

See your local representative for warranty information.

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
call +1.800.553.8033 or email info@tenantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

www.tenantco.com
info@tenantco.com