

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116


Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

A proposal for
OKLAHOMA STATE OF

Prepared by
PREMIER TRUCK GROUP OF TULSA
Mike Sartin

Jan 14, 2022

Western Star 4700

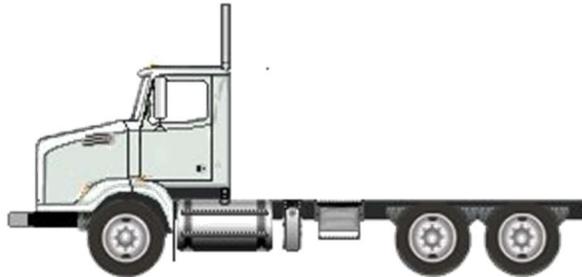

Components shown may not reflect all spec'd options and are not to scale

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

S P E C I F I C A T I O N P R O P O S A L

Description
Price Level
WESTERN STAR 4700 PRL-26T (EFF:7/26/21)
Data Version
SPECPRO21 DATA RELEASE VER 031
Vehicle Configuration
4700 2023 MODEL YEAR SPECIFIED SET BACK AXLE - TRUCK TRAILER TOWING PROVISION AT END OF FRAME WITH SAE J560 LH PRIMARY STEERING LOCATION
General Service
TRUCK/TRAILER CONFIGURATION DOMICILED, USA (EXCLUDING CALIFORNIA AND CARB OPT-IN STATES) CONSTRUCTION SERVICE GOVERNMENT BUSINESS SEGMENT DRY BULK COMMODITY TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS MAXIMUM 8% EXPECTED GRADE SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE WESTERN STAR VOCATIONAL WARRANTY EXPECTED FRONT AXLE(S) LOAD : 14000.0 lbs EXPECTED REAR DRIVE AXLE(S) LOAD : 40000.0 lbs EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 54000.0 lbs EXPECTED GROSS COMBINATION WEIGHT : 80000.0 lbs



Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

Truck Service

END DUMP BODY
3-V DISTRIBUTING INC

Engine

CUM L9 260 HP @ 2200 RPM; 2200 GOV RPM,
860 LB-FT @ 1200 RPM

Electronic Parameters

75 MPH ROAD SPEED LIMIT
CRUISE CONTROL SPEED LIMIT SAME AS ROAD
SPEED LIMIT
PTO MODE ENGINE RPM LIMIT - 700 RPM
PTO MODE BRAKE OVERRIDE - SERVICE
BRAKE APPLIED
PTO RPM WITH CRUISE SET SWITCH - 700 RPM
PTO RPM WITH CRUISE RESUME SWITCH - 700
RPM
PTO MODE CANCEL VEHICLE SPEED - 5 MPH
PTO GOVERNOR RAMP RATE - 250 RPM PER
SECOND
PTO MINIMUM RPM - 700
REGEN INHIBIT SPEED THRESHOLD - 5 MPH

Engine Equipment

2010 EPA/CARB/GHG21 CONFIGURATION
NO 2008 CARB EMISSION CERTIFICATION
STANDARD OIL PAN
ENGINE MOUNTED OIL CHECK AND FILL
SIDE OF HOOD AIR INTAKE WITH DONALDSON
HIGH CAPACITY AIR CLEANER WITH SAFETY
ELEMENT, FIREWALL MOUNTED
DR 12V 160 AMP 28-SI QUADRAMOUNT PAD
ALTERNATOR WITH REMOTE BATTERY VOLT
SENSE
(3) DTNA GENUINE, FLOODED STARTING, MIN
2250CCA, 510RC, THREADED STUD BATTERIES
BATTERY BOX FRAME MOUNTED
SINGLE BATTERY BOX FRAME MOUNTED LH
SIDE BACK OF CAB
WIRE GROUND RETURN FOR BATTERY CABLES
WITH ADDITIONAL FRAME GROUND RETURN
NON-POLISHED BATTERY BOX COVER

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

POSITIVE LOAD DISCONNECT WITH DASH MOUNTED CONTROL SWITCH

POSITIVE AND NEGATIVE POSTS FOR JUMPSTART LOCATED ON FRAME NEXT TO STARTER

LOW VOLTAGE BATTERY DISCONNECT AT 12.3 VOLTS FOR ISOLATED CIRCUITS WITH LOCAL ALARM

CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE

AIR COMPRESSOR DISCHARGE LINE

ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM

CUMMINS ENGINE INTEGRAL BRAKE WITH VARIABLE GEOMETRY TURBO ON/OFF

RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE

ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND DASH MOUNTED REGENERATION REQUEST SWITCH

11 FOOT 06 INCH (138 INCH+0/-5.9 INCH) EXHAUST SYSTEM HEIGHT

RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP

6 GALLON DIESEL EXHAUST FLUID TANK

100 PERCENT DIESEL EXHAUST FLUID FILL

STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING

LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION

STAINLESS STEEL AFTERTREATMENT DEVICE/MUFFLER/TAILOUTLET SHIELD

HORTON DRIVEMASTER ADVANTAGE ON/OFF FAN DRIVE

AUTOMATIC FAN CONTROL WITHOUT DASH SWITCH, NON ENGINE MOUNTED

CUMMINS SPIN ON FUEL FILTER

COMBINATION FULL FLOW/BYPASS OIL FILTER

1300 SQUARE INCH ALUMINUM RADIATOR

MOUNTING FOR FIREWALL MOUNTED SURGE TANK

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

ANTIFREEZE TO -34F, OAT (NITRITE AND SILICATE FREE) EXTENDED LIFE COOLANT
GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT
CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES
RADIATOR DRAIN VALVE
NO RADIATOR/OIL PAN GUARD
1310 ADAPTER FLANGE FOR FRONT PTO PROVISION
PHILLIPS-TEMRO 1000 WATT/115 VOLT BLOCK HEATER
NO OIL PREHEATER
CHROME ENGINE HEATER RECEPTACLE MOUNTED UNDER LH DOOR
ALUMINUM FLYWHEEL HOUSING
ELECTRIC GRID AIR INTAKE WARMER
DELCO 12V 38MT HD STARTER WITH INTEGRATED MAGNETIC SWITCH

Transmission

ALLISON 3000 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION

Transmission Equipment

ALLISON VOCATIONAL PACKAGE 223 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODELS RDS, HS, MH AND TRV
ALLISON VOCATIONAL RATING FOR CONCRETE MIXER APPLICATIONS ONLY AVAILABLE WITH 3000 PRODUCT FAMILIES
PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY
SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY
PRIMARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE
SECONDARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

PRIMARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE

SECONDARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE

MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN

PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED

TRANSMISSION PROGNOSTICS - ENABLED 2013

WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK

TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK

SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)

Front Axle and Equipment

DETROIT DA-F-18.0-5 18,000# FL1 71.0 KPI/3.74
DROP SINGLE FRONT AXLE

MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES

NON-ASBESTOS FRONT BRAKE LINING

CONMET CAST IRON FRONT BRAKE DRUMS

FRONT BRAKE DUST SHIELDS

FRONT OIL SEALS

VENTED FRONT HUB CAPS WITH WINDOW, CENTER AND SIDE PLUGS - OIL

STANDARD SPINDLE NUTS FOR ALL AXLES

HALDEX AUTOMATIC FRONT SLACK ADJUSTERS

STANDARD KING PIN BUSHINGS

TRW TAS-85 POWER STEERING

POWER STEERING PUMP

4 QUART POWER STEERING RESERVOIR

SYNTHETIC 40/50W FRONT AXLE LUBE

Front Suspension

18,000# FLAT LEAF FRONT SUSPENSION

GRAPHITE BRONZE BUSHINGS WITH SEALS - FRONT SUSPENSION

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

Rear Axle and Equipment

MT-40-14X 40,000# R-SERIES TANDEM REAR AXLE
5.29 REAR AXLE RATIO
IRON REAR AXLE CARRIER WITH OPTIONAL HEAVY DUTY AXLE HOUSING
MXL 17T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES
MXL 17T MERITOR EXTENDED LUBE INTERAXLE DRIVELINE WITH HALF ROUND YOKES
(1) INTERAXLE LOCK VALVE FOR TANDEM OR TRIDEM DRIVE AXLES
INDICATOR LIGHT FOR EACH INTERAXLE LOCKOUT SWITCH
MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES
NON-ASBESTOS REAR BRAKE LINING
ASPHALT SPREADER CLEARANCE REAR BRAKE GEOMETRY
CONMET CAST IRON REAR BRAKE DRUMS
REAR BRAKE DUST SHIELDS
REAR OIL SEALS
WABCO TRISTOP D LONGSTROKE 2-DRIVE AXLE SPRING PARKING CHAMBERS
HALDEX AUTOMATIC REAR SLACK ADJUSTERS
CURRENT AVAILABLE SYNTHETIC 75W-90 REAR AXLE LUBE

Rear Suspension

TUFTRAC 40,000# REAR SPRING SUSPENSION
TUFTRAC STANDARD RIDE HEIGHT
AXLE CLAMPING GROUP
54 INCH AXLE SPACING
FORE/AFT AND TRANSVERSE CONTROL RODS
REAR SHOCK ABSORBERS - TWO AXLES (TANDEM)

Brake System

WABCO 4S/4M ABS
REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES
FIBER BRAID PARKING BRAKE HOSE

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

STANDARD BRAKE SYSTEM VALVES
RELAY VALVE WITH 5-8 PSI CRACK PRESSURE,
NO REAR PROPORTIONING VALVE
WABCO SYSTEM SAVER HP WITH INTEGRAL
AIR GOVERNOR AND HEATER
AIR DRYER FRAME MOUNTED
STEEL AIR BRAKE RESERVOIRS
CLEAR FRAME RAILS FROM BACK OF CAB TO
FRONT REAR SUSPENSION BRACKET, BOTH
RAILS OUTBOARD
BW DV-2 AUTO DRAIN VALVE WITH HEATER TO
WET TANK; DRAIN VALVE CABLES ON ALL
OTHER TANKS
QUICK DISCONNECT FITTING WITH TIRE
INFLATION KIT

Trailer Connections

AIR CONNECTIONS TO END OF FRAME WITH
GLAD HANDS FOR TRUCK AND NO DUST
COVERS
PRIMARY CONNECTOR/RECEPTACLE WIRED
FOR SEPARATE STOP/TURN, ABS CENTER PIN
POWERED THROUGH IGNITION
SAE J560 7-WAY PRIMARY TRAILER CABLE
RECEPTACLE MOUNTED END OF FRAME

Wheelbase & Frame

4900MM (193 INCH) WHEELBASE
7/16X3-9/16X11-1/8 INCH STEEL FRAME
(11.11MMX282.6MM/0.437X11.13 INCH) 120KSI
1/4 INCH (6.35MM) C-CHANNEL INNER FRAME
REINFORCEMENT
1500MM (59 INCH) REAR FRAME OVERHANG
FRAME OVERHANG RANGE: 51 INCH TO 60
INCH
24 INCH INTEGRAL FRONT FRAME EXTENSION
CALC'D BACK OF CAB TO REAR SUSP C/L (CA) :
129.61 in
CALCULATED EFFECTIVE BACK OF CAB TO
REAR SUSPENSION C/L (CA) : 126.61 in
CALC'D FRAME LENGTH - OVERALL : 321.62 in
FRAME HEIGHT TOP FRONT UNLADEN : 42.85 in
FRAME HEIGHT TOP FRONT LADEN : 39.89 in
FRAME HEIGHT TOP REAR UNLADEN : 41.85 in

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

FRAME HEIGHT TOP REAR LADEN : 39.35 in
CALCULATED FRAME SPACE LH SIDE : 33.36 in
CALCULATED FRAME SPACE RH SIDE : 155.32
in
SQUARE END OF FRAME
STANDARD WEIGHT ENGINE CROSSMEMBER
STANDARD CROSSMEMBER BACK OF
TRANSMISSION
STANDARD MIDSHIP #1 CROSSMEMBER(S)
STANDARD REARMOST CROSSMEMBER
HEAVY DUTY SUSPENSION CROSSMEMBER
STANDARD WEIGHT REAR SUSPENSION
CROSSMEMBER

Chassis Equipment

14 INCH PAINTED STEEL BUMPER
BUMPER MOUNTING FOR SINGLE LICENSE
PLATE
FRONT ANTI-SPRAY CAB MOUNTED MUDFLAPS
GRADE 8 THREADED HEX HEADED FRAME
FASTENERS
EXTERIOR HARNESSSES WRAPPED IN
ABRASION TAPE

Fuel Tanks

100 GALLON/378 LITER ALUMINUM FUEL TANK -
LH
25 INCH DIAMETER FUEL TANK(S)
PLAIN ALUMINUM/PAINTED STEEL
FUEL/HYDRAULIC TANK(S) WITH PAINTED
BANDS
FUEL TANK(S) FORWARD
PLAIN STEP FINISH
FUEL TANK CAP(S)
DAVCO 245 FUEL/WATER SEPARATOR WITH
WATER IN FUEL SENSOR
EQUIFLO INBOARD FUEL SYSTEM
HIGH TEMPERATURE REINFORCED NYLON
FUEL LINE
FUEL COOLER

Tires

GOODYEAR G751 MSA 12R22.5 16 PLY RADIAL
FRONT TIRES

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

MICHELIN X MULTI D 11R22.5 14 PLY RADIAL
REAR TIRES

Hubs

CONMET PRESET PLUS PREMIUM IRON FRONT
HUBS
CONMET PRESET PLUS PREMIUM IRON REAR
HUBS

Wheels

ACCURIDE 29039 22.5X9.00 10-HUB PILOT 5.25
INSET 5-HAND STEEL DISC FRONT WHEELS
ACCURIDE 28828 22.5X8.25 10-HUB PILOT 2-
HAND HD STEEL DISC REAR WHEELS
FRONT WHEEL MOUNTING NUTS
REAR WHEEL MOUNTING NUTS
NO PUSHER/TAG WHEEL MOUNTING NUTS

Cab Exterior

110 INCH BBC STEEL CONVENTIONAL CAB
WESTERN STAR PAINTED ALUMINUM CAB
SKIRT
AIR CAB MOUNTS WITH CHECK VALVE
NONREMOVABLE BUGSCREEN MOUNTED
BEHIND GRILLE
FRONT FENDERS
LH AND RH EXTERIOR GRAB HANDLES WITH
RUBBER INSERTS AND RH INTERIOR GRAB
HANDLE MOUNTED TO A POST
STATIONARY BRIGHT FINISH GRILLE
CHROME HOOD MOUNTED AIR INTAKE GRILLE
GALVANEALD STEEL SEVERE SERVICE CAB
FIBERGLASS HOOD
HOOD OPENING ASSIST
SINGLE HADLEY SD-978 26 INCH
RECTANGULAR AIR HORN
DUAL ELECTRIC HORNS
SINGLE HORN SHIELD
DOORS AND IGNITION KEYED THE SAME
REAR LICENSE PLATE MOUNT END OF FRAME
SINGLE RECTANGULAR H4 HALOGEN
HEADLIGHTS WITH BRIGHT BEZELS
(5) AMBER MARKER LIGHTS

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

WIRING AND SWITCH FOR CUSTOMER
FURNISHED SNOW PLOW LAMPS WITH DUAL
CONNECTIONS AT BUMPER
INTEGRAL STOP/TAIL/BACKUP LIGHTS
STANDARD FRONT TURN SIGNAL LAMPS
DUAL WEST COAST STAINLESS STEEL HEATED
MIRRORS WITH LIGHTS AND LH AND RH
REMOTE
DOOR MOUNTED MIRRORS
102 INCH EQUIPMENT WIDTH
LH AND RH 8 INCH STAINLESS STEEL CONVEX
MIRRORS MOUNTED BELOW PRIMARY
MIRRORS
RH DOWN VIEW MIRROR
STANDARD SIDE/REAR REFLECTORS
FIBERGLASS EXTERIOR SUN VISOR
17.5X35 INCH TINTED REAR WINDOW
TINTED DOOR GLASS
MANUAL DOOR WINDOW REGULATORS
2-PIECE ROPED-IN HEATED WIPER PARK
SOLAR GREEN GLASS WINDSHIELD
2 GALLON WINDSHIELD WASHER RESERVOIR
WITH FLUID LEVEL INDICATOR, MOUNTED
UNDER CAB, WITH REMOTE FILL

Cab Interior

GRAY VINYL BASE INTERIOR
BLACK HARD TRIM
BASE LEFT HAND DOOR TRIM
BASE RIGHT HAND DOOR TRIM
BLACK MATS WITH SINGLE INSULATION
ASH CUP AND (1) POWER OUTLET
FORWARD ROOF MOUNTED CONSOLE
LH AND RH DOOR MAP POCKETS
(2) COAT HOOKS ON BACKWALL OF CAB
(1) DOUBLE CUP HOLDER WITH CELL PHONE
HOLDER LH OR RH DASH
TWO-TONE CHARCOAL UPPER/COOL GRAY
LOWER SOFT TOUCH WING DASH WITH BLACK
DRIVER SIDE COSMETIC UNDER DASH COVER
5 LB. FIRE EXTINGUISHER

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

HEATER, DEFROSTER AND AIR CONDITIONER WITH CONSTANT TEMPERATURE CONTROL AND COSMETIC COVER

HVAC DUCTING WITH FOAM MAIN FRESH AIR FILTER

MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH

STANDARD HEATER PLUMBING

VALEO HEAVY DUTY A/C REFRIGERANT COMPRESSOR

RADIATOR MOUNTED AIR CONDITIONER CONDENSER

BINARY CONTROL, R-134A

CAB INSULATION

AUTOMATIC SELF-RESET CIRCUIT BREAKERS/FUSES IN DASH POWER DISTRIBUTION BOXES AND FUSES IN AUXILIARY POWER DISTRIBUTION BOXES

DOOR ACTIVATED DOME LIGHT, UNDER DASH LIGHT AND LH AND RH DOOR MOUNTED COURTESY LIGHTS

CAB DOOR LATCHES WITH MANUAL DOOR LOCKS

(1) 12 VOLT POWER SUPPLY AND (2) USB PORTS MOUNTED IN DASH

BASIC HIGH BACK AIR SUSPENSION DRIVER SEAT WITH 1 CHAMBER AIR LUMBAR, INTEGRATED CUSHION EXTENSION AND REAR CUSHION TILT

BASIC HIGH BACK AIR SUSPENSION PASSENGER SEAT WITH 1 CHAMBER AIR LUMBAR, INTEGRATED CUSHION EXTENSION AND REAR CUSHION TILT

GRAY VINYL DRIVER SEAT COVER

GRAY VINYL PASSENGER SEAT COVER

3 POINT DRIVER AND PASSENGER SEAT BELT RETRACTORS

ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN

4-SPOKE 18 INCH (450MM) LEATHER WRAPPED STEERING WHEEL WITH SWITCHES

DRIVER AND PASSENGER INTERIOR SUN VISORS

Instruments & Controls

NON-ADJUSTABLE SUSPENDED PEDALS

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

ELECTRONIC ACCELERATOR CONTROL
BRIGHT ARGENT FINISH GAUGE BEZELS
BLACK VINYL DRIVER INSTRUMENT PANEL
BLACK VINYL CENTER INSTRUMENT PANEL
LOW AIR PRESSURE INDICATOR LIGHT AND
AUDIBLE ALARM
2 INCH PRIMARY AND SECONDARY AIR
PRESSURE GAUGES
INTAKE MOUNTED AIR RESTRICTION
INDICATOR WITH GRADUATIONS
97 DB BACKUP ALARM
ELECTRONIC CRUISE CONTROL WITH
CONTROLS ON STEERING WHEEL SPOKES
KEY OPERATED IGNITION SWITCH AND
INTEGRAL START POSITION; 4 POSITION
OFF/RUN/START/ACCESSORY
ICU4ME DRIVER MESSAGE CENTER WITH
GRAPHICAL DISPLAY, BLACK FACE GAUGES,
DIAGNOSTICS AND DATA LINKED
HEAVY DUTY ONBOARD DIAGNOSTICS
INTERFACE CONNECTOR LOCATED BELOW LH
DASH
2 INCH ELECTRIC FUEL GAUGE
PROGRAMMABLE RPM CONTROL -
ELECTRONIC ENGINE
ELECTRICAL ENGINE COOLANT TEMPERATURE
GAUGE
2 INCH TRANSMISSION OIL TEMPERATURE
GAUGE
ELECTRONIC OUTSIDE TEMPERATURE
SENSOR DISPLAY IN DRIVER MESSAGE
CENTER
ELECTRIC ENGINE OIL PRESSURE GAUGE
AM/FM/WB WORLD TUNER RADIO WITH
AUXILIARY INPUT, J1939
ROOF/OVERHEAD CONSOLE MOUNTED RADIO
(4) RADIO SPEAKERS IN CAB
POWER AND GROUND WIRING FOR CB RADIO
IN OVERHEAD CONSOLE
ROOF/OVERHEAD CONSOLE CB RADIO
PROVISION
MULTI-BAND AM/FM/WB/CB LH MIRROR
MOUNTED ANTENNA SYSTEM

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Description

ELECTRONIC MPH SPEEDOMETER WITH
SECONDARY KPH SCALE, WITH ODOMETER
STANDARD VEHICLE SPEED SENSOR
ELECTRONIC 3000 RPM TACHOMETER
NO VEHICLE PERFORMANCE MONITOR
IGNITION SWITCH CONTROLLED ENGINE STOP
BW TRACTOR PROTECTION VALVE
TRAILER HAND CONTROL BRAKE VALVE
DIGITAL VOLTAGE DISPLAY INTEGRAL WITH
DRIVER DISPLAY
SINGLE ELECTRIC WINDSHIELD WIPER MOTOR
WITH DELAY
CAB/TRAILER MARKER LIGHT SWITCH WITH
SEPARATE HEADLIGHT SWITCH WITH
HEADLIGHT/MARKER LIGHT INTERRUPTER
SWITCHES ON STEERING WHEEL
TWO VALVE PARKING BRAKE SYSTEM WITH
WARNING INDICATOR
SELF CANCELING TURN SIGNAL SWITCH,
HEADLAMP HIGH/LOW AND FLASH,
WASH/WIPE/INTERMITTENT
PACIFIC INSIGHT ELECTRONIC FLASHER

Design

PAINT: ONE SOLID COLOR

Color

CAB COLOR A: L0006EY WHITE ELITE EY
CAB INTERIOR PAINTED SAME AS CAB COLOR
BLACK, HIGH SOLIDS POLYURETHANE CHASSIS
PAINT
POWDER WHITE (N0006EA) FRONT
WHEELS/RIMS (PKWHT21, TKWHT21, W, TW)
POWDER WHITE (N0006EA) REAR
WHEELS/RIMS (PKWHT21, TKWHT21, W, TW)
BUMPER PAINTED SAME AS CHASSIS
SUNVISOR PAINTED SAME AS CAB COLOR A

Certification / Compliance

U.S. FMVSS CERTIFICATION, EXCEPT SALES
CABS AND GLIDER KITS

Raw Performance Data

CALCULATED EFFECTIVE BACK OF CAB TO
REAR SUSPENSION C/L (CA) : 126.61 in

Prepared for:
CINI ZACHARIA
OKLAHOMA STATE OF
5005 N LINCOLN BLVD
OKLAHOMA CITY, OK 73105
Phone: 405-521-2116

Prepared by:
Mike Sartin
PREMIER TRUCK GROUP OF
TULSA
5104 W. 60TH STREET
TULSA, OK 74107
Phone: 918-445-5300 ext 4061

Extended Warranty

TC4: US HD STANDARD/MODERATE VOCATIONAL 2 YEARS/200,000
MILES/322,000 KM EXTENDED TRUCK COVERAGE
TOWING: 2 YEARS/UNLIMITED MILES/KM EXTENDED TOWING
COVERAGE \$550 CAP FEX APPLIES

(***) All cost increases for major components (Engines, Transmissions, Axles, Front and Rear Tires) and government mandated requirements, tariffs, and raw material surcharges will be passed through and added to factory invoices.